

INT-60

Experience the power

The INT-60 is a massive towing unit. It is the king of the INT series. It combines tough towing and recovery performance for the most demanding jobs. Designed for practicality and reliability, this unit is definitely different from the usual Heavy Duty wrecker.



Standard features

- 4724 mm (186") Cab to centre of tandem steel body
- Frame fork holders
- Frame fork racks
- Chain racks
- 4 sets of frame forks
- Chrome door handle
- Driver and passenger side manual controls
- Safety chains

Options

- Wireless remote control
- 609 mm (24"), 762 mm (30"), 914 mm (36"), 1219 mm (48"), 1828 mm (72") tunnel box
- Custom length tunnel box
- Extra frame forks
- Wheel lift receivers for single / double tires
- Full recovery tool package
- Custom storage system
- Aluminum / Composite body
- European body style
- Gravel guard undercoating finish
- Front push bumper
- XP, X-shape side puller
- Chrome hand rails
- A-arm style side winches
- In cab controls
- European style low under lift
- Full size LED light bar
- LED - working lights, strobe lights, lights inside toolbox
- Custom painting
- Installation services and extended warranty
- Tow operators education & training



Designed in Canada




Two very powerful
25 ton (55,000 lbs) winches

MTT towing tailgate allows you
to access chains and forks faster

Underlift capacity
at full extension
is 8.1 ton (18,000 lbs)



3 stage boom can reach a height of 8.9 meters (351")
capacity is 15 ton (33,000 lbs) at 40° fully extended

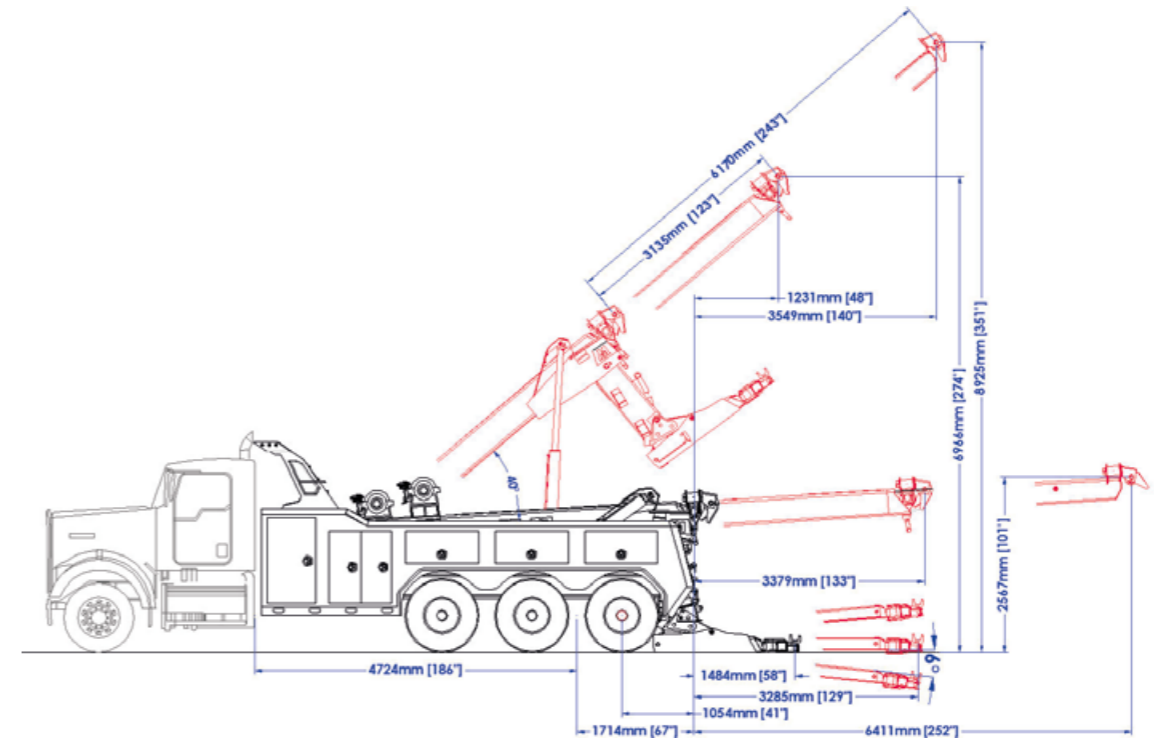

NOTE: Axle configuration is subject to local laws and regulations. All information in this document is for references only. Optional configuration might be shown.

Advantages

- 60 ton (132,200 lbs) actual capacity lets you work with any situation
- Z-shape boom allows to transfer load to front axle
- Two rear anchor legs hold the wrecker safely even on icy roads
- Large storage boxes for all your tools
- New look will turn heads!

Notes:

- Information with a star (*) is for our low profile European style under lift specifications
 - Some optional equipment may be shown.
 - All ratings are based on structural and design factors only. Vehicle chassis capacity and capabilities can vary significantly, affecting the overall performance and rating of the unit. All chassis specifications are minimums, heavier specifications may be required depending on chassis and equipment weights. Please contact your nearest distributor for additional information.
- Metro Tow Trucks Co. reserves the right to change, improve or modify products, which may change the specifications, models and features availability at any time without notice and without obligation. Please contact your nearest distributor for additional information.
- © 2013 Metro Tow Trucks. All rights reserved. This material may not be reproduced, displayed, modified or distributed without the express prior written permission of the copyright holder. For permission, contact Sales@MetroTowTrucks.com

Underlift Specifications / * = Euro Option

Retracted capacity on forks	25 ton (55,000 lbs) / * 23 ton (51,000 lbs)
Retracted distance to the forks	1484 mm (58") / * 1701 mm (67")
Extended capacity on forks	8.1 ton (18,000 lbs) / * 6.3 ton (14,000 lbs)
Extended distance to the forks	3285 mm (129") / * 3657 mm (144")
Negative tilt angle	-6°
Tow Rating	36 ton (80,000 lbs)

Vehicle Recommendations

Front axle(s) weight (min)	6.6 ton (14,600 lbs)
Rear axle(s) weight (min)	3 x 9 ton (20,000 lbs)
Recommended Tire size	R22.5
Clear CB	4724mm (186")

Boom Specifications

Retracted capacity (at 40°)	60 ton (132,200 lbs)
Extended capacity (at 40°)	15 ton (33,000 lbs) 3rd stage
Maximum Lift angle	40°
Maximum Hook Height	3rd stage: 8925 mm (351")
Reach Past Tailboard	3rd stage: 6411 mm (252")

Winch Specifications

Quantity	2 pcs
Pulling force (on 1st layer)	25 ton (55,000 lbs)
Winch Type	Planetary
Cable Specs	22 mm x 60 m (7/8" x 200')